

TW5242



The **connection** of things.

TW5242 Smart GNSS Antenna

Overview

The TW5242 is a multi-constellation GNSS Receiver which provides simultaneous GPS/GLONASS/SBAS reception. It is designed for use in professional grade digital tracking/positioning applications.

The TW5242 uses a state of the art ST STA8088 receiver which provides 32 high sensitivity tracking channels plus 2 fast acquisition channels which can be assigned to acquire and track GPS, GLONASS, QZSS, and SBAS (WAAS, EGNOS, MSAS) signals simultaneously.




The TW5242 employs Tallysman's Accutenna™ dual feed antenna patch technology which greatly improves rejection of multi-path signal interference, making it the most precise antenna for tracking in dense urban environments.

The TW5242 output NMEA 0183 messages lists with navigation update rate of 1Hz. It has a RS232 interface and 9V to 36 V operation for automotive applications.

Tallysman's Windows™ based configurator application enables configuration of parameters such as baud rates, output message rates, constellation, tracking parameters.

Interface

The TW5242 has a 5 meter cable terminated in RJ12 connector. Adaptor cables are available for connecting to a variety of Two-Way radios, PC, etc contact Tallysman for details.

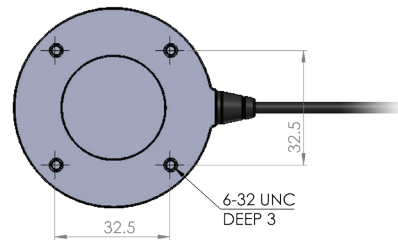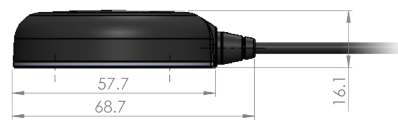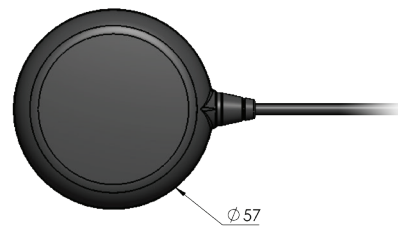

Mechanical Dimensions (mm)

Features

- Multi-Constellation Receiver/Antenna
- 32 Channel simultaneous operation
- High performance tracking (162 dBm)
- Conditional ignition input for Tait Radios
- 9V-36V automotive operation
- Excellent multi-path signal rejection
- Industrial grade IP67 enclosure
- RoHS, REACH, RED compliant. CE marking

TW5242 Smart GNSS Antenna

Specifications

Antenna

ArchitectureDual Feed
Axial Ratio< 1 dB typical.
Frequencies.....GPS / GLONASS / QZSS
SBASWAAS, EGNOS, MSAS
Channels.....32 simultaneous plus 2 fast acquisition
Navigation Accuracy
GPS+GLONASS1.55m (50% CEP)

Interface

Outputs.....Pwr, Gnd, Tx
InputsRx
RS232

Mechanical

Dimensions57 mm dia. x 15 mm H
Weight.....130 g
Mounting MethodMagnetic Mount
Cable Length.....5 m with RJ12 termination
EnclosureIndustrial grade magnetic mount weatherproof IP67

Electrical

Voltages9 V to 36 VDC
Current50 mA during acquisition
40 mA operating

Environmental

Operating Temperature.....-40°C to +85°C
Storage Temperature.....-45°C to +85°C
WeatherproofIP67
Shock.....Vertical axis 50G, other axis 30G
3 axis sweep – 15 min
Vibration.....10-200 Hz log sweep 3G

Sensitivity

Acquisition.....-146 dBm
Tracking-162 dBm

Time to First Fix

Cold start35 sec
Warm start30 sec
Hot start<2 sec
Reacquisition<1 sec

Serial Protocol

Output.....NMEA 0183
Baud Rate.....Configurable
Update Rate.....Configurable up to 10Hz
Constellations

Ordering Information:

32-5242-6-10-05-ccc

ccc= Custom Configuration (Contact Tallysman for “Custom” details e.g. configuration, radio cable type.

e.g. PC0= NMEA out, no adaptor cable TC3= Tait NMEA, 27-0118-1 radio cable

TW5242 Configuration Cable

27-0117-0 T

Please refer to the Ordering Guide for the current and complete list of available products.



TALLYMATICS®

The **connection** of things.

Tallymatics manufactures high performance, telematics products and solutions for a wide range of applications. With support for both RF wireless and data networks, Tallymatics enables high-resolution location awareness of mobile field assets across any type of wireless network. Tallymatics is a division of Tallysman.

© 2019 Tallymatics Inc. All rights reserved. Tallymatics, “The connection of things” tag line and the Tallymatics logo are trademarks or registered trademarks of Tallymatics Inc. and/or its affiliates in Canada and certain other countries. All other trademarks mentioned in this document are the property of their respective owners. The information presented is subject to change without notice. Tallysman assumes no responsibility for any errors or omissions in this document. Tallymatics is a division of Tallysman Inc. Tallymatics hereby disclaims any or all warranties and liabilities of any kind.

Contact us:
info@tallymatics.com
T: +1 613 591-3131

Tallymatics Inc.
36 Steacie Drive,
Ottawa ON
K2K 2A9 Canada

www.tallymatics.com